

PolyTECT™ is a penetrating fluoropolymer designed to preserve the beauty and integrity of your paved areas and stone surfaces. The treatment sits within the pavement interstices, protecting the paving substrate from staining and contamination. Contaminants remain on the surface and are easily removed by normal cleaning methods.

Benefits

- Perfect for high traffic areas.
- Works on surfaces such as stone, travertine, limestone, pavement, and more.
- Suitable for ground surfaces with high levels of foot traffic.
- Easy to apply on most surfaces and the surface can be used within 1 hour of application.
- Surface protection helps reduce further on-going maintenance.
- UV resistant, non-flammable, and nontoxic.


PolyTECT™ has a 15-year life expectancy when the product is applied by the approved method.

Features

- Repels water, grease, alcohol, oil, and inhibits airborne dirt and stains
- Aids with the easy removal of chewing gum
- Resists graffiti
- Reduces Efflorescence
- Inhibits moss and algae growth
- Reduces tire and skid marks
- Can be used on vertical and horizontal surfaces for interior and exterior
- Improves the thermal insulation value of a treated surface*
- Reduces surface degradation from atmospheric contaminants and “freeze/thaw” cycles
- Contains Zero Volatile Organic Compound (V.O.C.)

Application

Always test apply on a small hidden portion of the substrate before applying.

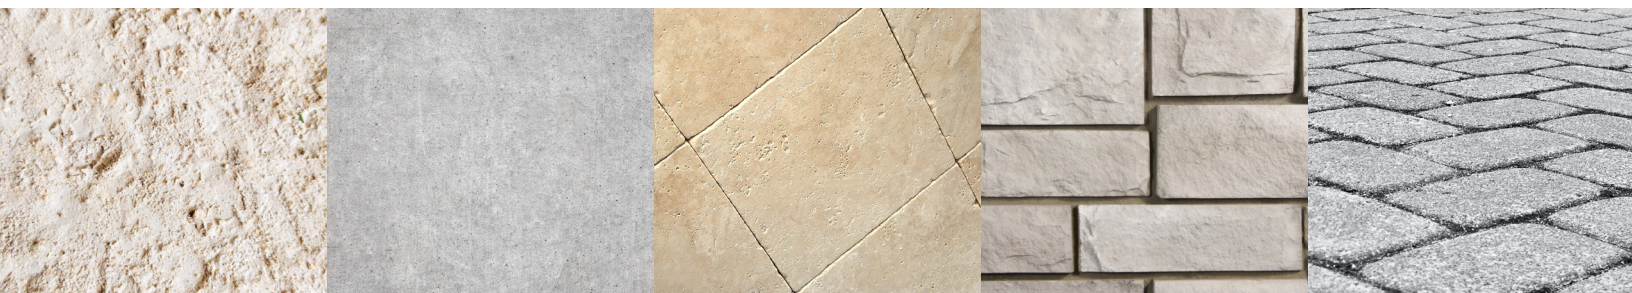

Limestone

Concrete

Travertine

Natural Stone

Pavers

- Any cracks in substrate must be repaired using a concrete/mortar repair system.
- Moisture content should be equal or less than 12% to a depth of 1cm.
- Substrate needs to be clean; free from dust, dirt, oil, efflorescence, organic growth, and old paint films.
- Remove any residual of spores, molds, or organic growth in general. In case of dirt or old paint residues, wash the substrate.
- May be applied using low pressure spray, brush, or roller. Ensure application is from bottom to top on vertical surfaces, taking care not to let the production run. Any subsequent applications must be applied until saturation.

Notes

- PolyTECT™: Cannot be re-applied after curing as there will be a loss of adhesion.
- PolyTECT™: Is unable to work if applied over non-absorbent surfaces.
- Do not apply PolyTECT™ if rain is expected within 4 hours.

Coverage

- Architectural Concrete: 184 SqFt/Gal (4-6 SqM/Ltr)
- Block Paving: 285 SqFt/Gal (5-8 SqM/Ltr)
- Porous-Natural Stone (Limestone, Sandstone): 82 SqFt/Gal (2-5 SqM/Ltr)
- Low Porosity Stone (Granite, Marble, Slate, Terracotta): 652 SqFt/Gal (8-16 SqM/Ltr)
- The coverage may vary according to the porosity of the stone.

